




NOTES

- WIRE CABLE CODES AND SYMBOLS:

W	WHITE	BL	BLUE	BK	BLACK
G	GREEN	R	RED	Y	YELLOW
O	ORANGE	BR	BROWN	S	SLATE
P	PURPLE				

—X DENOTES WIRES TO BE TAPED, OR SPLICED AND TAPED.
- ASSOCIATED CABLES:

————	106896 CABLE
-----	117590 CABLE (POWER)
-----	136661 CABLE
-----	136438 CABLE
-----	MOTOR LEADS
- CONNECTORS ARE SHOWN FROM PRONG AND SLOT ENDS.
- 60024RM TUBING CUT TO 3/4" LENGTHS - 2 PLACES.
60027RM TUBING CUT TO 3/4" LENGTHS - 2 PLACES.
- COVER LEADS AT GOVENOR RESISTOR TERMINALS WITH HIGH TEMPERATURE TUBING. 60278RM FOR NO.22 WIRE, 60279RM FOR NO.18 WIRE, AND 60280RM FOR MOTOR LEADS.
- CUT LEAD TO 5" LENGTH, SKIN, TWIST, AND TIN 3/8".

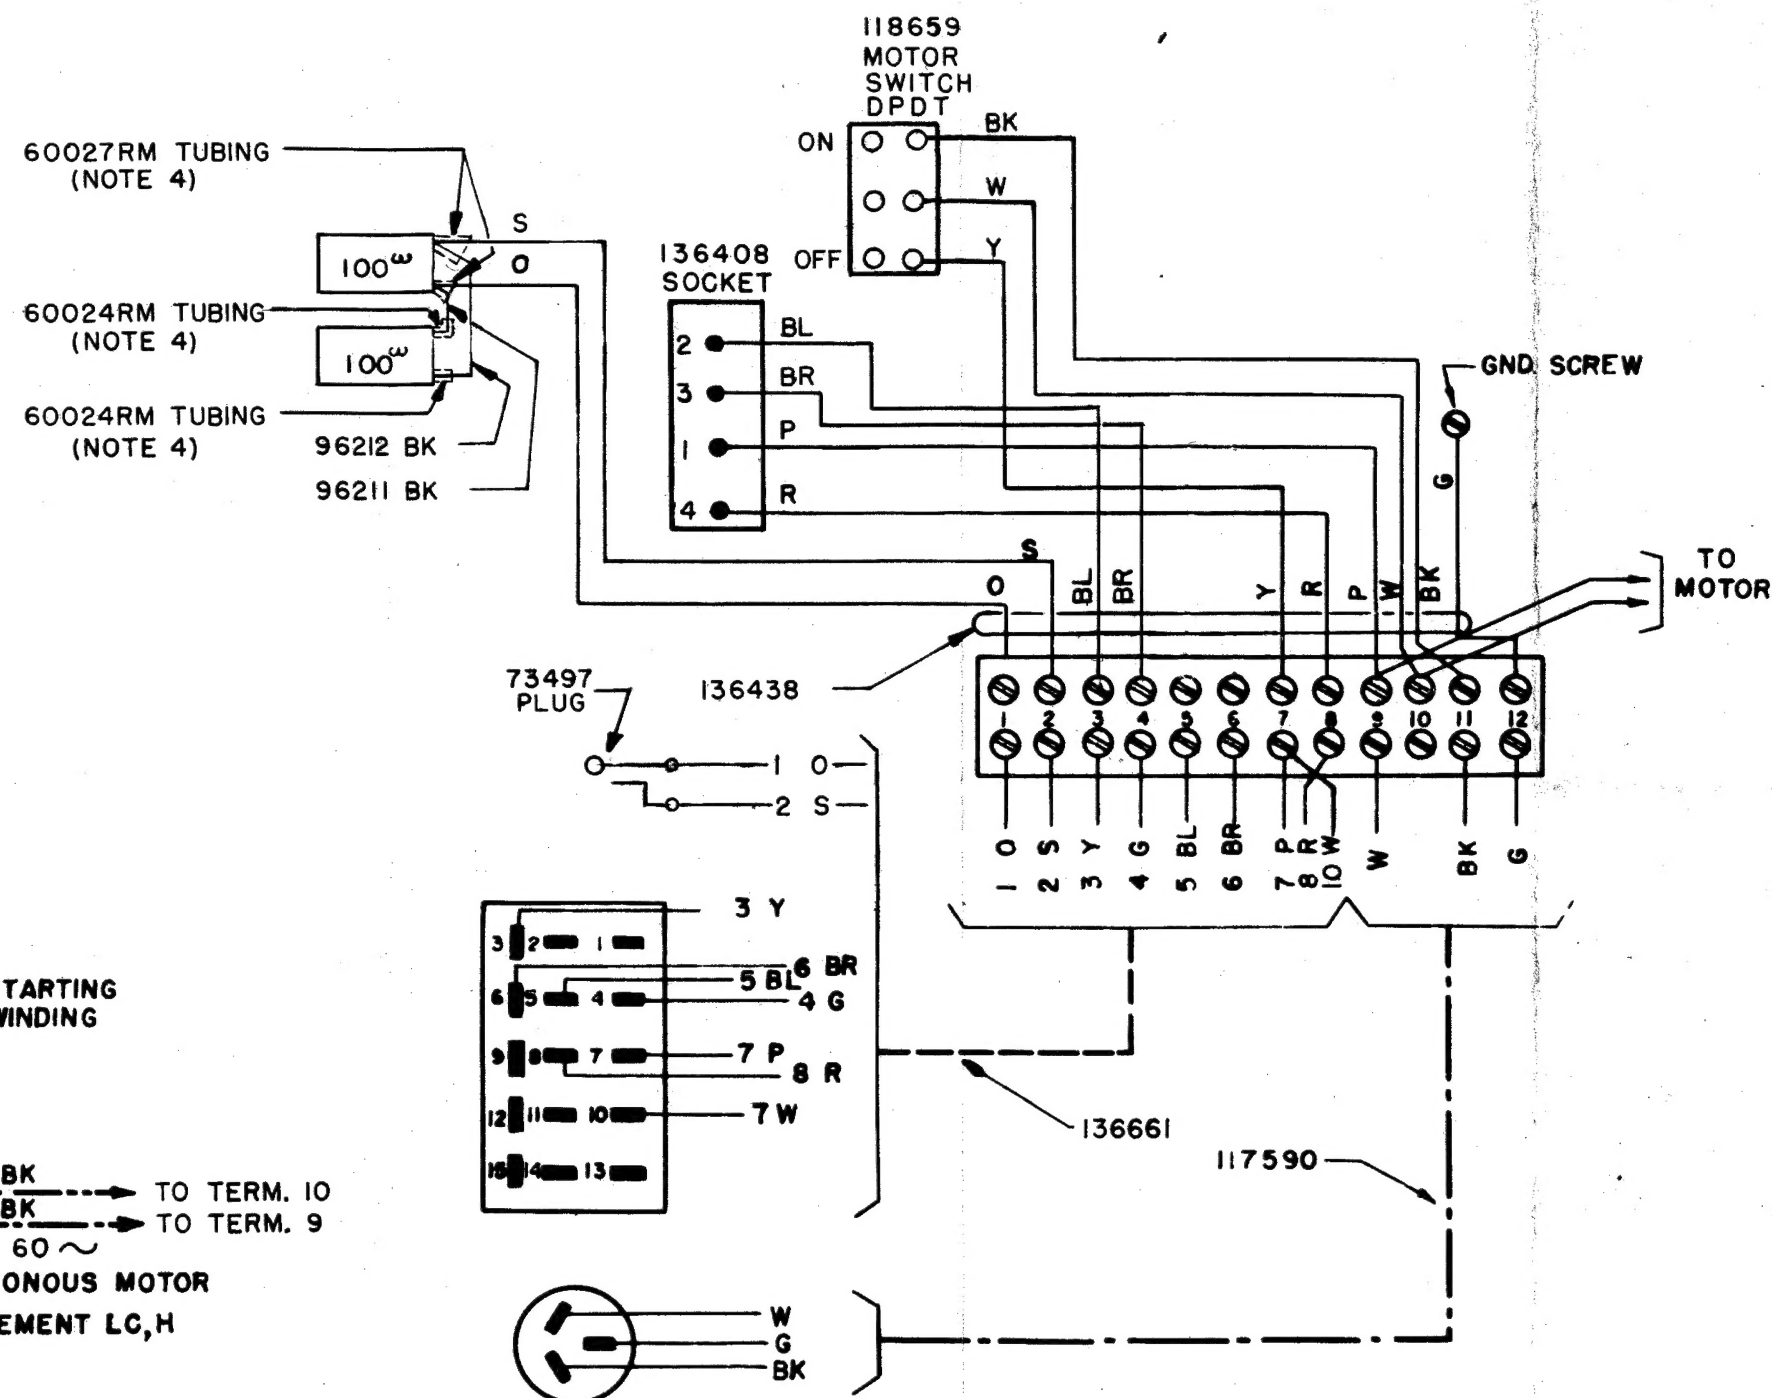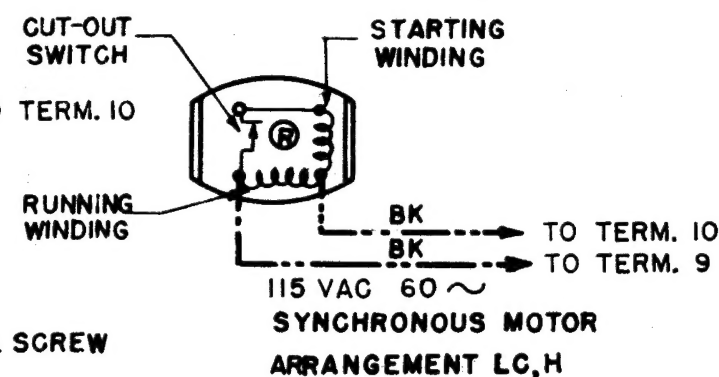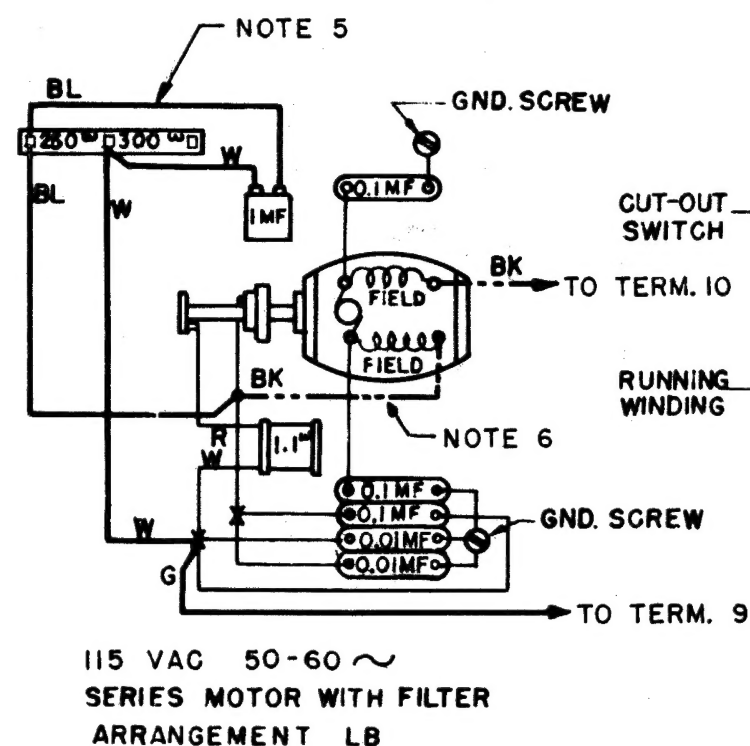

RTTY ELECTRONICS
 TELETYPE Sales-Service-Parts
 PO Box 20101 El Sobrante, Ca.
 94820. (510)222-3102
 mr_rtty@pacbell.net

REVISIONS

- | | | |
|---|---------|-------|
| A | 9-20-55 | 61821 |
| B | | |
| C | | |
| D | | |
| E | | |
| F | | |
| G | | |
| H | | |

3146 WD
 4-11-55

ACTUAL
 WIRING DIAGRAM
 TYPING
 REPERFORATOR
 FPR 74
 MOTOR ARR'GT.N. LB, LC

DRAWN: V. W. APPROVED
 ENGR'D: [Signature]
 CHECKED: [Signature]
 FILE: 6-A2AA

TELETYPE
 CORPORATION